


REV.	APPR.	BY	DATE

REV.	APPR.	BY	DATE

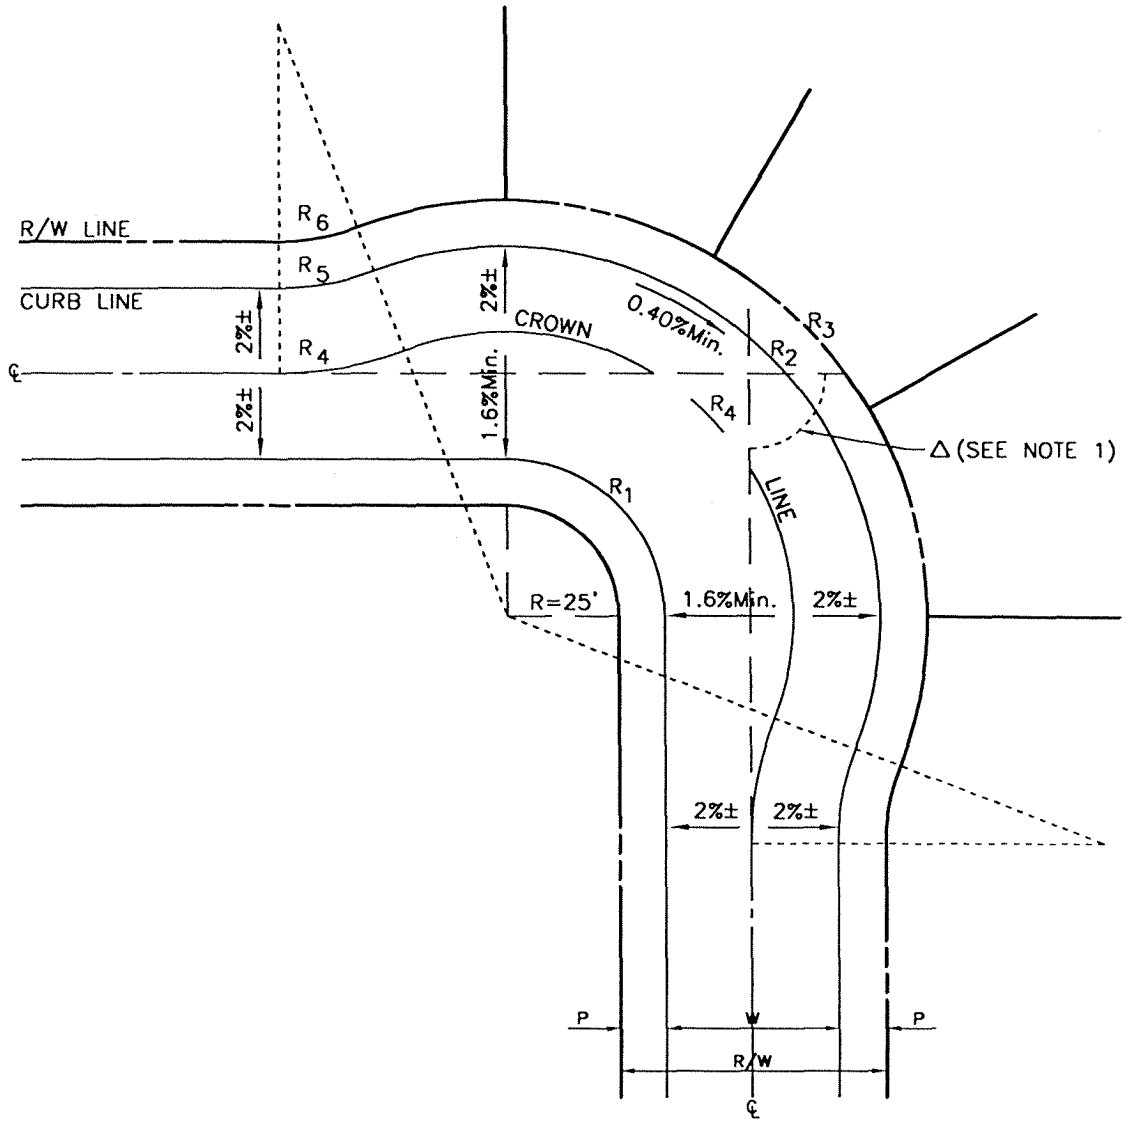

**NOTE:**

1. When Δ is less than 72° a smooth curve with a minimum radius conforming with the standards for the particular geometric section shall be used.
2. Sidewalk at all driveways must meet disabled access requirement of 2% max. crossfall.

R/W	W	R <sub>1</sub>	R <sub>2</sub>	R <sub>3</sub>	R <sub>4</sub>	R <sub>5</sub>	R <sub>6</sub>	P
60	40	35	80	90	60	40	30	10
49	36	35	78	84.5	60	42	35.5	6.5
45	32	35	76	82.5	60	44	37.5	6.5



CITY OF

**KNUCKLE INTERSECTION**

STANDARD PLAN  
2002

DRAWN: STAFF CKD.: STAFF *LB*

PLATE 109

Department of Public Works

APPR.

*Granville M. Bowman*  
Granville M. Bowman

SHEET 1 OF 1